


NOTE:
 1. CLEANOUTS SHALL BE ADDED AT ALL CHANGES IN DIRECTION ALONG PERFORATED UNDERDRAIN.

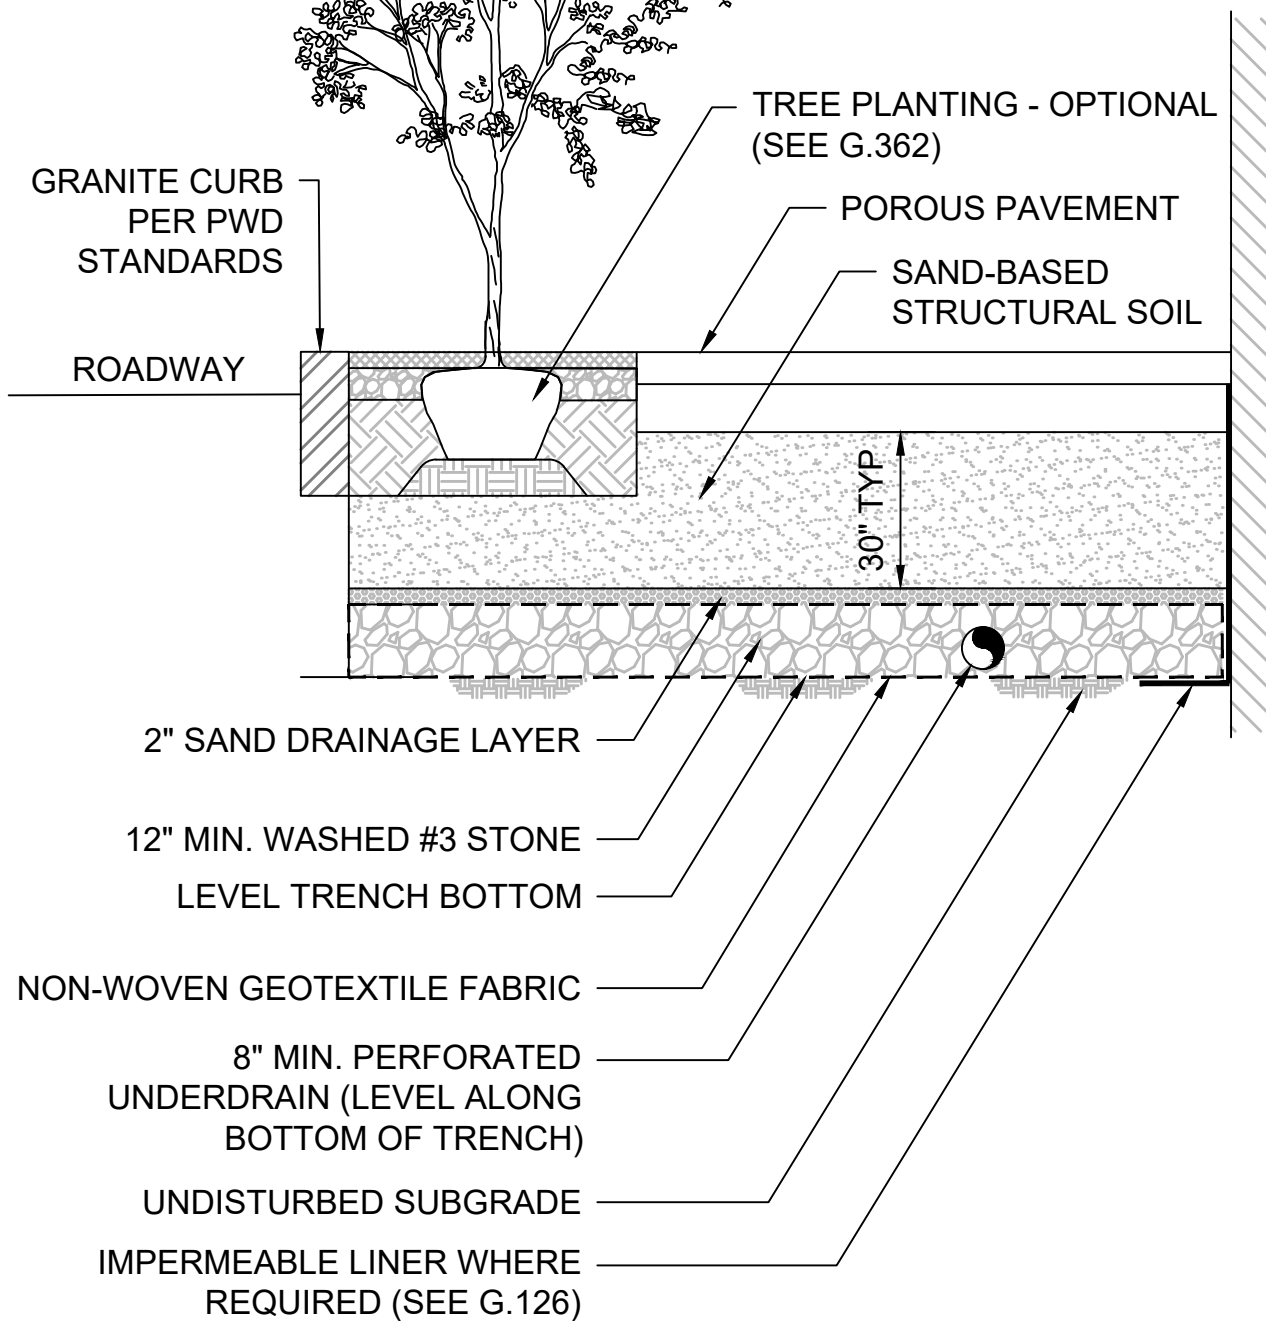

GRANITE CURB
 PER PWD
 STANDARDS

TREE PLANTING - OPTIONAL
 (SEE G.362)

POROUS PAVEMENT

SAND-BASED
 STRUCTURAL SOIL

ROADWAY

30" TYP

2" SAND DRAINAGE LAYER

12" MIN. WASHED #3 STONE
 LEVEL TRENCH BOTTOM

NON-WOVEN GEOTEXTILE FABRIC

8" MIN. PERFORATED
 UNDERDRAIN (LEVEL ALONG
 BOTTOM OF TRENCH)

UNDISTURBED SUBGRADE

IMPERMEABLE LINER WHERE
 REQUIRED (SEE G.126)



**Public Works Department
 Engineering Division**
 1 CITY HALL SQUARE, ROOM 710
 BOSTON, MA 02201
 (617) 635-4968

**SAND BASED STRUCTURAL SOIL
 INFILTRATION TRENCH WITH
 POROUS PAVEMENT**

DATE OF ISSUE:
 DECEMBER 2024

SCALE: N.T.S.

DETAIL NO.
 G.332