



42 Commonwealth Avenue Vestibule Restoration

1/14/22

Description of Work

- **Front Door:**
 - New custom arched double doors.
 - Door details to match historic existing door above:
 - Rail width & style, molding profile, and glazing detail.
 - Take out soffit in Entry area to get full use of the arch which works with the existing Arched windows on the same level.
 - Delete Iron work on the front door.
 - Door to fill existing opening – no change to masonry.


- **Decorative Exterior Sconces:**
 - Replace existing with new decorative lights in a Bronze finish.

- **Rear Door:**
 - New exterior entry door, dimension to match existing.
 - Door to fill existing opening – no change to masonry.

Existing Conditions – Front Door




Existing Conditions – Rear Door

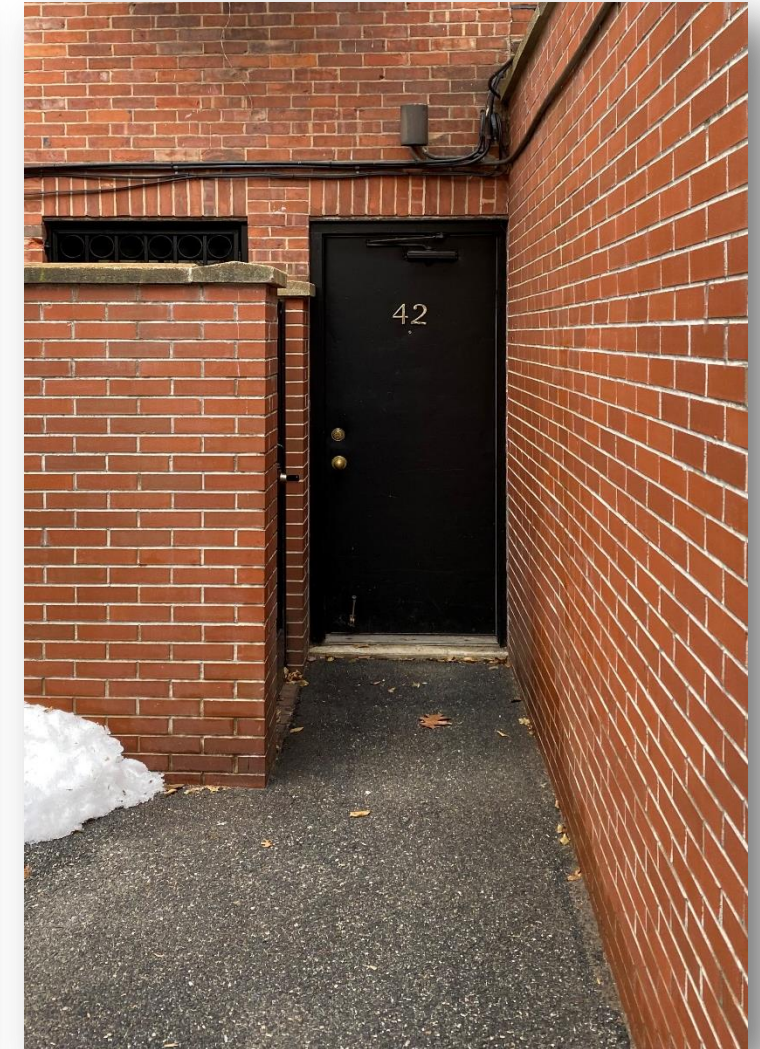


Exterior Entry Elevations



Exterior Entry Elevations (Cont.)

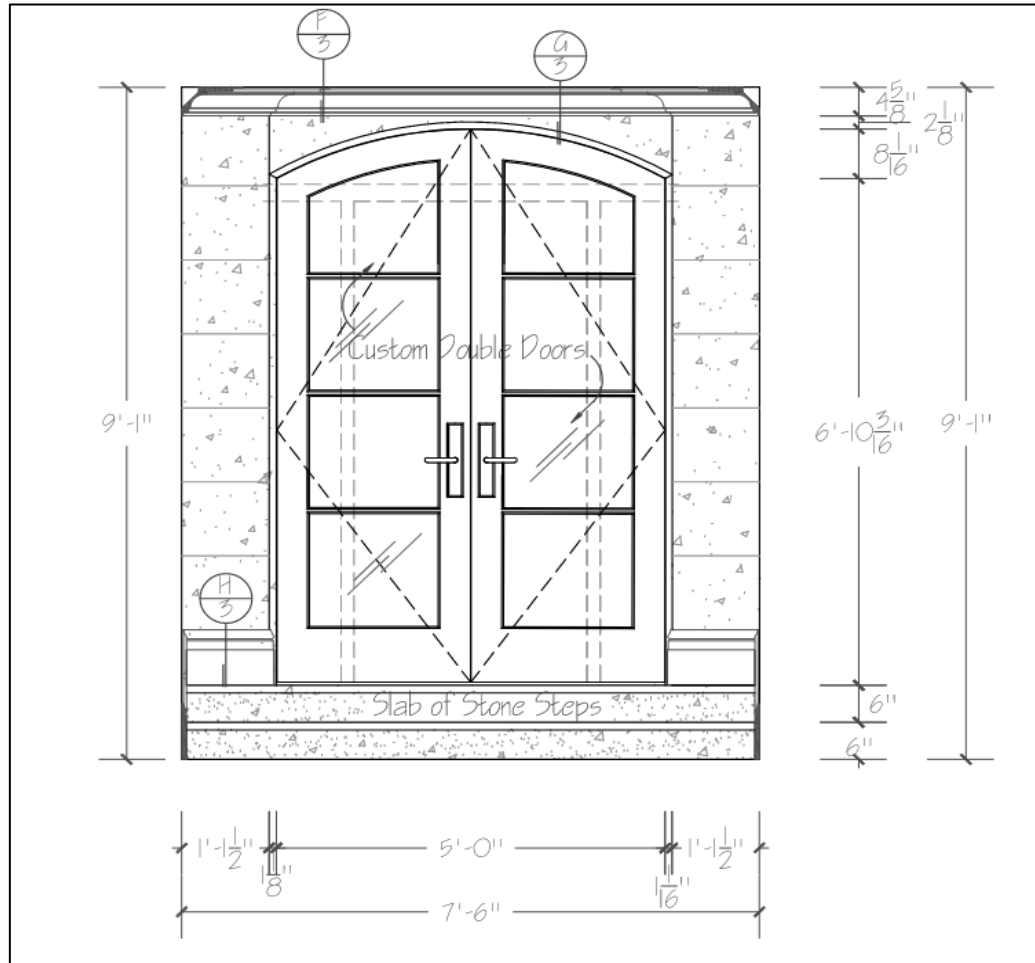


(A) Foyer Elevation
 Scale: 1/2" = 1'

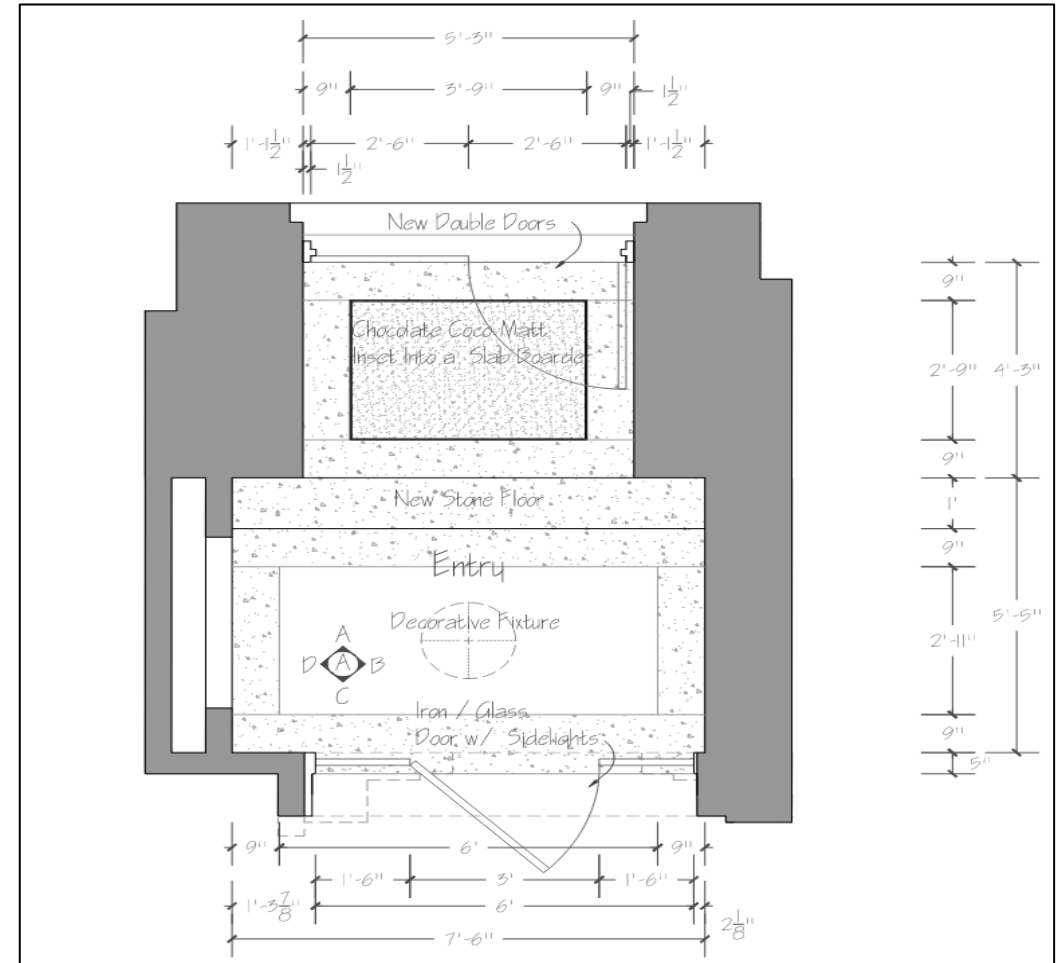

(E) Foyer Floor Plan
 Scale: 1/2" = 1'

New Exterior Sconces

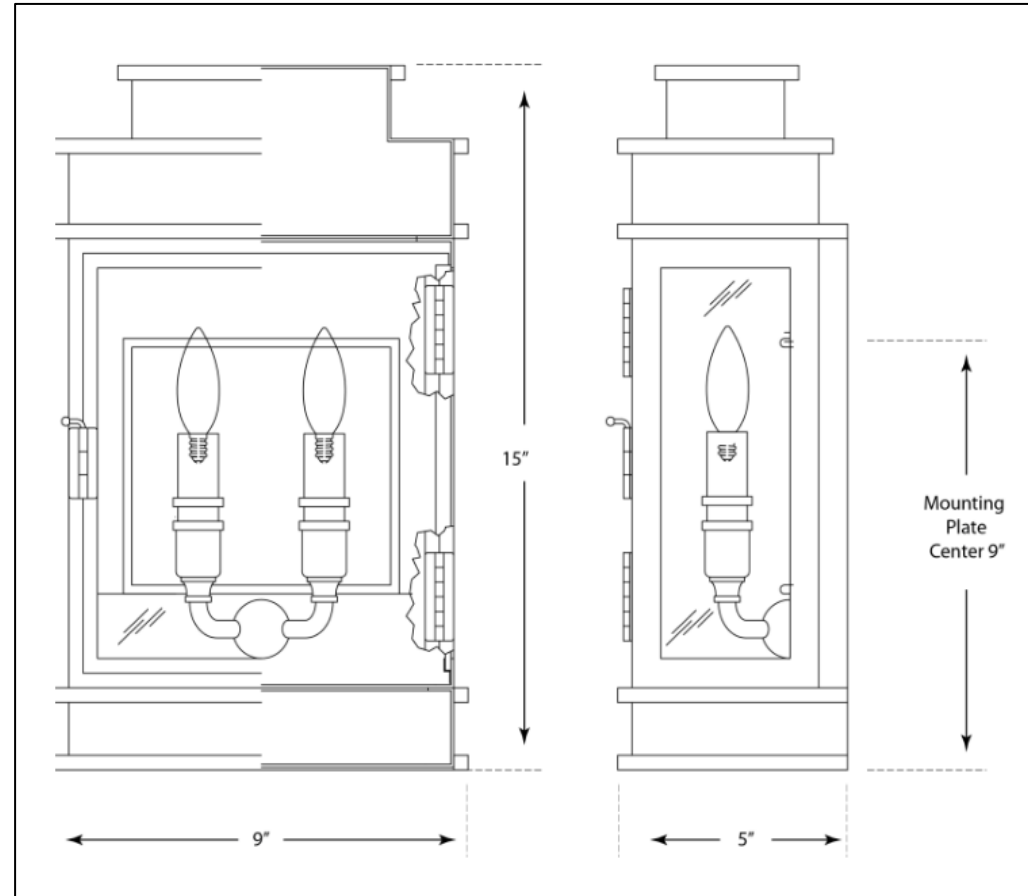

Designer: Chapman & Myers

Height: 15"

Width: 9"

Extension: 5"

Backplate: 9" x 13" Rectangle

Finishes: AB, BZ

Glass Options: CG

Socket: 2 - E12 Candelabra

Wattage: 2 - 60 C11

Weight: 11 Pounds

©EFC DESIGNS

