


NOTE:
 1. CLEANOUTS SHALL BE ADDED AT ALL CHANGES IN DIRECTION ALONG PERFORATED UNDERDRAIN.

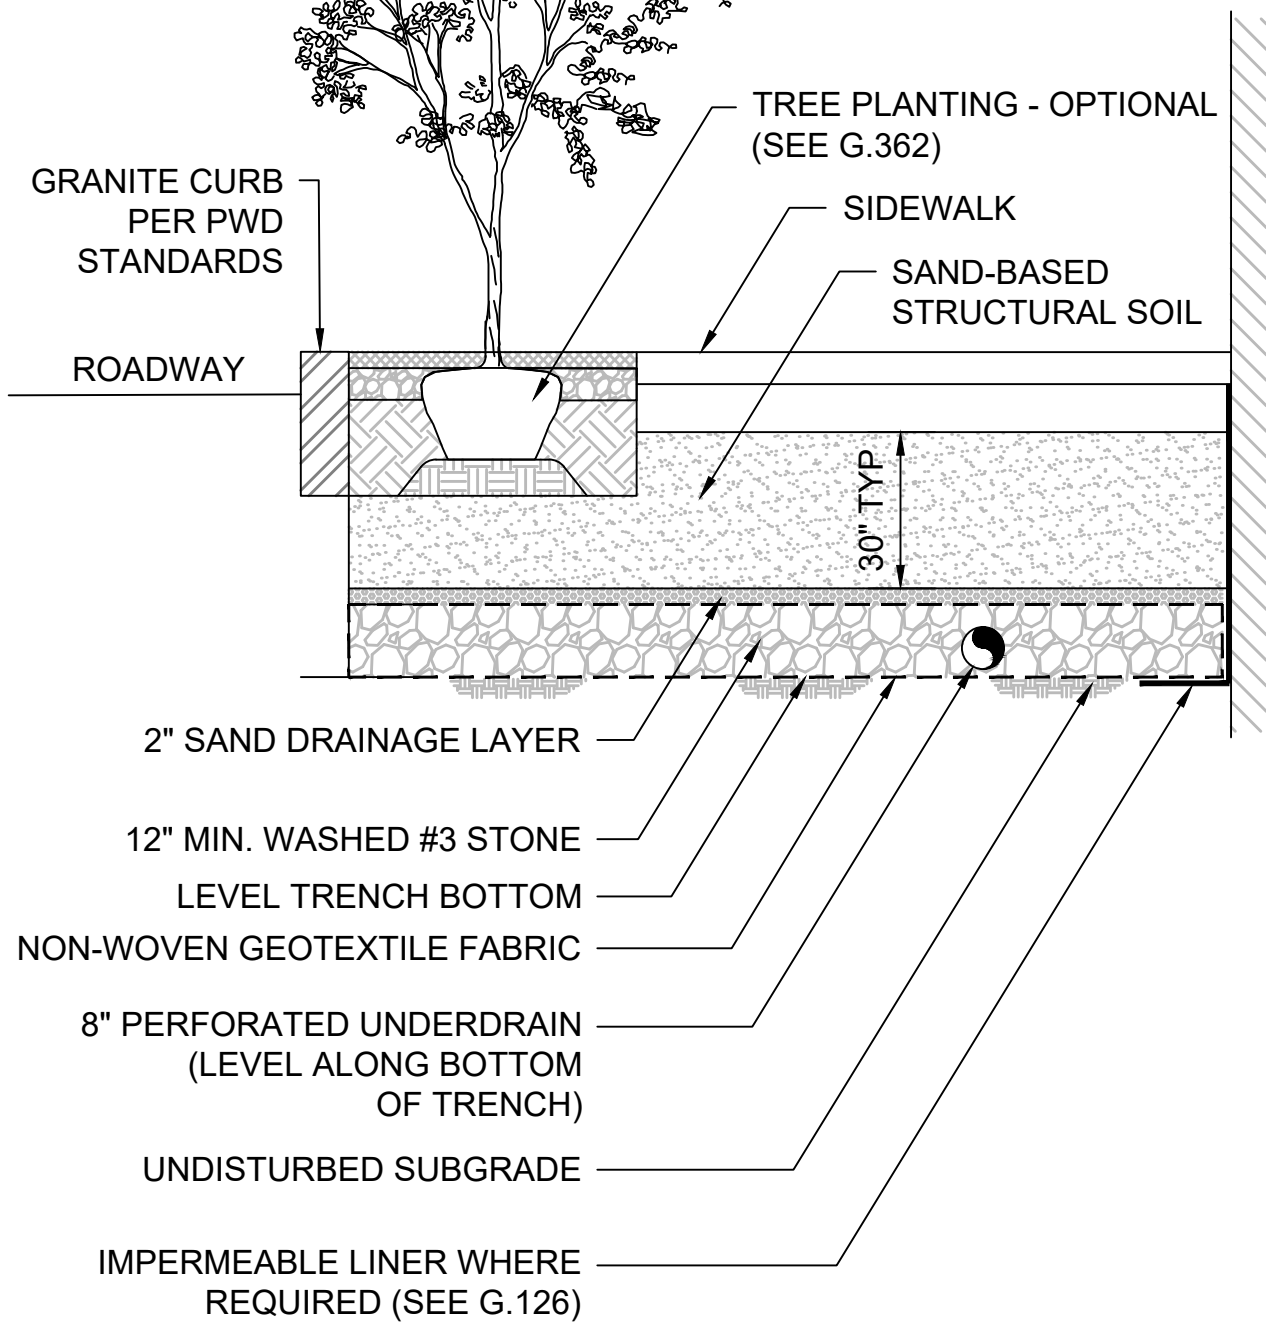

GRANITE CURB
 PER PWD
 STANDARDS

ROADWAY

TREE PLANTING - OPTIONAL
 (SEE G.362)

SIDEWALK

SAND-BASED
 STRUCTURAL SOIL

30" TYP

2" SAND DRAINAGE LAYER

12" MIN. WASHED #3 STONE

LEVEL TRENCH BOTTOM

NON-WOVEN GEOTEXTILE FABRIC

8" PERFORATED UNDERDRAIN
 (LEVEL ALONG BOTTOM
 OF TRENCH)

UNDISTURBED SUBGRADE

IMPERMEABLE LINER WHERE
 REQUIRED (SEE G.126)



**Public Works Department
 Engineering Division**

1 CITY HALL SQUARE, ROOM 710
 BOSTON, MA 02201
 (617) 635-4968

**SAND BASED STRUCTURAL SOIL
 INFILTRATION TRENCH WITH
 NON-POROUS PAVEMENT**

DATE OF ISSUE:
 DECEMBER 2024

SCALE: N.T.S.

DETAIL NO.
 G.331